


RF: PHR 6312, PHASAK

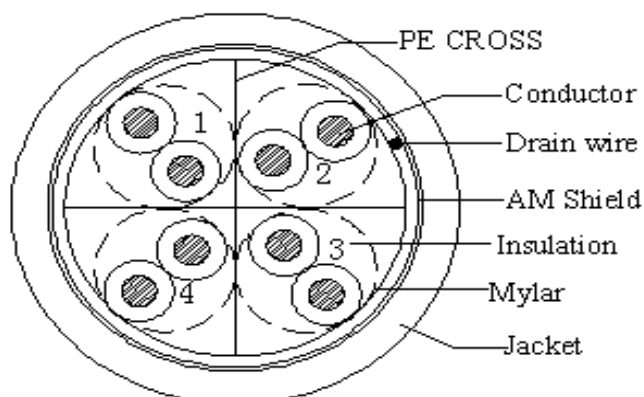

Color cord

- 1. Blue-White/Blue
- 2. Orange-White/Orange
- 3. Green-White/Green
- 4. Brown-White/Brown

FTP CAT6 23AWG CCA

No. of Cord.	4 Pair 對	
Conductor	Material	CCA
	Construction	23AWG; 1 / 0.565 ± 0.008 mm
Insulation	Material	Polyethylene
	Thickness	0.25±0.02 mm
	Diameter	1.09 ± 0.05 mm
Inner Layer	Direction	S(右向)
	Pitch REF	30mm underneath
Outside Layer	Direction	S (右向)
	Pitch REF	90±5mm
Cross	Material	Polyethylene
	Construction	4.4mm×4.4mm
Shielding1	Material	Mylar Spirally Wrapped
	Coverage	100% coverage with 25% overlapping
Drain Wire	Material	Aluminum Magnesium metal
	Construction	1 / 0.40 ± 0.008 mm or 7/0.12±0.008 mm
Shielding2	Material	Aluminum Mylar Spirally Wrapped
	Coverage	100% coverage with 25% overlapping, face inside
Rip cord	Material	Yarn
Jacketing	Material	PVC
	Thickness	0.55mm (Min. Thickness: 0.48mm)
	Diameter	6.5±0.3 mm
	Color	Optional
Marking	Optional	

ELECTRICAL PROPERTIES

Insulation Resistance	Min. 5000 mega ohms-km at 20°C
Dielectric Test	1000V DC /1 min ; No Breakdown
Temperature Rating	60°C
Voltage Rating	30V

DRWN.	JK	SPEC NO:	Construction: 1/0.56CCA×4P+PE Cross+M+D+AM+Rip cord+ PVC
CHKD.	BOB		Customer:
APPD.		DATE: 2017.05.29	